


Features

- Compatible with 4” standard recessed housings
- High efficiency, Energy saving
- Excellent performance and no glare
- Slim, stylish and light weight design
- Easy to install with flexible torsion springs
- Damp and Wet location
- Suitable for type IC, type non-IC housings

4” Downlight

Diameter:	5.04in/128mm	Carton size:	345*315*315mm
Height:	3.19in/81mm	Q'ty/ctn:	12 pcs

Item Code	Description	Wattage	Color Temp	Input Voltage	Output Lumen	Equiv.wattage	CRI	Beam Angle	Dimmable
DX-DL4-US-01-9W	LED8DL4/DIM	9W	2700-4000K	120V 60Hz	600LM	50W	80	85°	YES
DX-DL4-US-02-9W	LED8DL4/DIM/ANTI-GLARE	9W	2700-4000K	120V 60Hz	600LM	50W	80	85°	YES
DX-DL4-US-01-9W	LED8DL4/DIM	9W	2700-4000K	120V 60Hz	500LM	50W	90	85°	YES
DX-DL4-US-02-9W	LED8DL4/DIM/ANTI-GLARE	9W	2700-4000K	120V 60Hz	500LM	50W	90	85°	YES

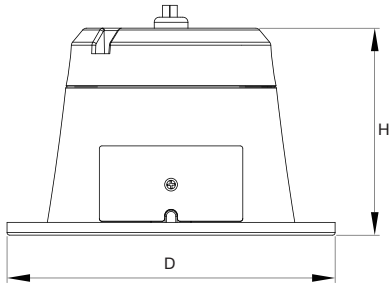

Applications

- Widely used in homes, offices, restaurants, hotels, buses, trains, warehouses, parking lots, meeting room school, library, factory, warehouse, casino, parking garage, hospital, commercial center, supermarket, shopping mall etc

