


Features


- Compatible with 5”&6” standard recessed housings
- High efficiency, Energy saving
- Excellent performance and no glare
- Slim, stylish and light weight design
- Easy to install with flexible torsion springs
- Damp and Wet location
- Suitable for type IC, type non-IC housings

6” Downlight

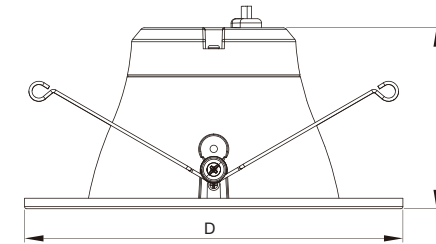

Applications

- Widely used in homes, offices, restaurants, hotels, buses, trains, warehouses, parking lots, meeting room school, library, factory, warehouse, casino, parking garage, hospital, commercial center, supermarket, shopping mall etc

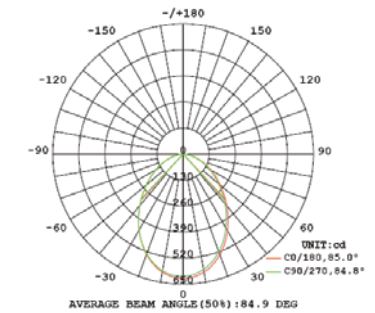

Diameter:	7.09in/180mm	Carton size:	415*360*380mm
Height:	3.39in/86mm	Q'ty/ctn:	12 pcs

Item Code	Description	Wattage	Color Temp	Input Voltage	Output Lumen	Equiv.wattage	CRI	Beam Angle	Dimmable
DX-DL5/6-US-01-13W	LED12DL5/6/DIM	13W	2700-4000K	120V 60Hz	900LM	65W	80	85°	YES
DX-DL5/6-US-02-13W	LED12DL5/6/DIM/ANTI-GLARE	13W	2700-4000K	120V 60Hz	900LM	65W	80	85°	YES
DX-DL5/6-US-01-13W	LED12DL5/6/DIM	13W	2700-4000K	120V 60Hz	750LM	65W	80	85°	YES
DX-DL5/6-US-02-13W	LED12DL5/6/DIM/ANTI-GLARE	13W	2700-4000K	120V 60Hz	750LM	65W	80	85°	YES

