

Features


- Home automation smart lighting controlled by smart phone or tablet
- TW: CCT Changing
- RGBW: Color changing and CCT changing
- Dimmable at each set color temperature and color
- Lifetime: 20,000 hours
- Control light sources with simple to use scenes and grouping via the App

Smart Downlight



Applications

- Widely used in homes, offices, restaurants, hotels, buses, trains, warehouses, parking lots, meeting room school, library, factory, ware house, casino, parking garage, hospital, commercial center, supermarket, shopping mall etc.

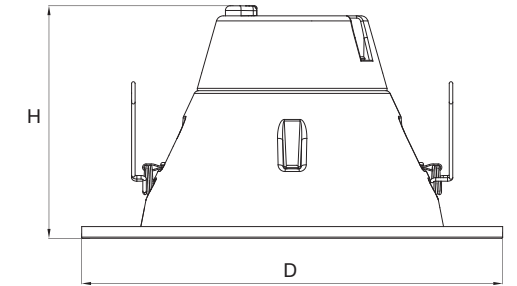

Diameter:	7.09in/180mm	Carton size:	415*360*415mm
Height:	3.75in/95.1mm	Q'ty/ctn:	12 pcs



Item Code	Description	Wattage	Color Temp	Input Voltage	Output Lumen	CRI	Beam Angle	Dimmable
DX-5/6" downlight-OFD-BLE	BLE OFD 5/6" downlight	11W	2700K	100-240V	800LM	80	85°	YES
DX- 5/6" downlight-TW-BLE	BLE TW 5/6" downlight	11W	2700-6500K	100-240V	800LM	80	80°	YES
DX- 5/6" downlight-RGBW-BLE	BLE RGBW 5/6" downlight	13W	2700-6500K	100-240V	800LM	80	80°	YES
DX-5/6" downlight-OFD-ZB	ZigBee OFD 5/6" downlight	11W	2700K	100-240V	800LM	80	85°	YES
DX-5/6" downlight-TW-ZB	ZigBee TW 5/6" downlight	11W	2700-6500K	100-240V	800LM	80	80°	YES
DX-5/6" downlight-RGBW-ZB	ZigBee RGBW 5/6" downlight	13W	2700-6500K	100-240V	800LM	80	80°	YES

