


Features

- Ultra energy efficient
- With magnet to install the light module, can change qty ever you like
- Good heat dissipation with professional designed aluminum alloy track
- Isolating power supply, safety and reliability
- Solid-state, fast turn on
- Easily installed
- Longevity of service and minimal maintenance

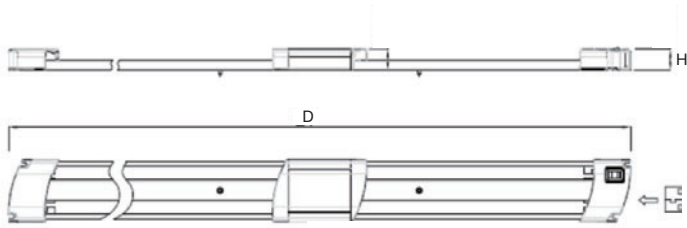

Applications

- Widely used in homes, offices, restaurants, hotels, buses, trains, warehouses, parking lots, meeting room school, library, factory, warehouse, casino, parking garage, hospital, commercial center, supermarket, shopping mall etc.

Slide Light

Diameter:	/	Carton size:	635*320*225mm	935*320*225mm
Height:	0.8in/20.3mm	Q'ty/ctn:	36 pcs	36 pcs

Item Code	Description	Wattage	Color Temp	Input Voltage	Output Lumen	Equiv.wattage	CRI	Beam Angle	Dimmable
DX-SL60	60mm	5W	2700-6500K	24V	340~370LM	40W	80	105°	NO
DX-SL90	90mm	5W	2700-6500K	24V	340~370LM	40W	80	105°	NO
DX-SL120	120mm	5W	2700-6500K	24V	340~370LM	40W	80	105°	NO
DX-SL150	150mm	5W	2700-6500K	24V	340~370LM	40W	80	105°	NO

