


Features


- Patent three-dimensional heat dissipation technology
- Designed to last at least 50,000 hours
- Thermal Dissipation & housing with integration, standardization and modular design
- IP65 modules: high waterproof level, easy for installation and replacement
- Light efficiency higher than 100lm/W
- Disability glare rating T1<10, discomfort glare rating G>5



Street Light

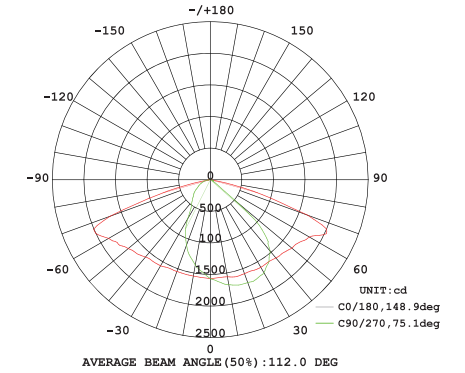

	STL-1M-XXX	STL-2M-XXX	STL-3M-XXX	STL-4M-XXX
Length:	16.26in/413mm	25.64in/575mm	29.02in/737mm	35.39in/899mm
Width:	14.02in/356mm	14.02in/356mm	14.02in/356mm	14.02in/356mm
Height:	3.33in/84.5mm	3.33in/84.5mm	3.33in/84.5mm	3.33in/84.5mm
Carton size:	470*410*170mm	630*410*170mm	790*410*170mm	950*410*170mm
Q'ty/ctn	1 pc	1 pc	1 pc	1 pc

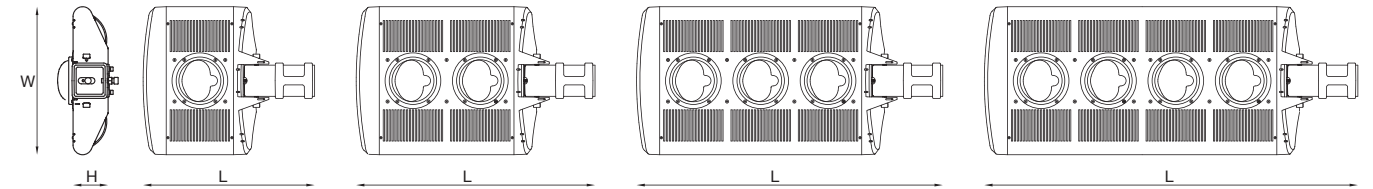

Item Code	Wattage	Color Temp	Input Voltage	Output Lumen	CRI	Dimmable
DX-STL-1M-050	50W	3000K/4000K/5700K	100-240V/277V/480V	5000	>70	YES/NO
DX-STL-2M-080	80W	3000K/4000K/5700K	100-240V/277V/480V	8000	>70	YES/NO
DX-STL-2M-100	100W	3000K/4000K/5700K	100-240V/277V/480V	10000	>70	YES/NO
DX-STL-3M-120	120W	3000K/4000K/5700K	100-240V/277V/480V	12000	>70	YES/NO
DX-STL-3M-150	150W	3000K/4000K/5700K	100-240V/277V/480V	15000	>70	YES/NO
DX-STL-4M-180	180W	3000K/4000K/5700K	100-240V/277V/480V	18000	>70	YES/NO
DX-STL-4M-200	200W	3000K/4000K/5700K	100-240V/277V/480V	20000	>70	YES/NO
DX-STL-4M-240	240W	3000K/4000K/5700K	100-240V/277V/480V	24000	>70	YES/NO

