
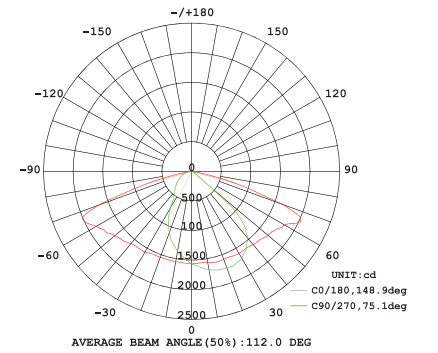


Features

- Patent three-dimensional heat dissipation technology
- Designed to last at least 50,000 hours
- Thermal Dissipation & housing with integration, standardization and modular design
- IP65 modules: high waterproof level, easy for installation and replacement
- Light efficiency higher than 100lm/W
- Disability glare rating T1<10, discomfort glare rating G>5

Tunnel Light

	TUL-1M-XXX	TUL-2M-XXX
Length:	7.6in/193mm	13.98in/355mm
Width:	14.02in/356mm	14.02in/356mm
Height:	5.59in/142mm	5.59in/142mm
Carton size:	240*410*170mm	400*410*170mm
Q'ty/ctn	1 pc	1 pc

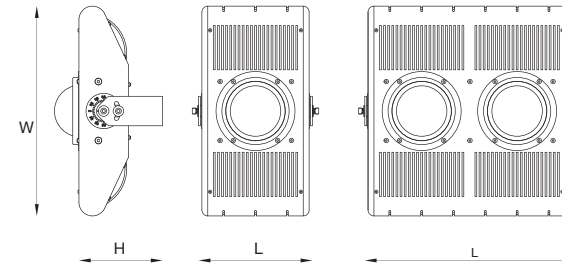

Item Code	Wattage	Color Temp	Input Voltage	Output Lumen	CRI	Dimmable
DX-TUL-1M-050	50W	3000K/4000K/5700K	100-240V/277V/480V	5000	>70	YES/NO
DX-TUL-2M-080	80W	3000K/4000K/5700K	100-240V/277V/480V	8000	>70	YES/NO
DX-TUL-2M-100	100W	3000K/4000K/5700K	100-240V/277V/480V	10000	>70	YES/NO

