

Features


- Patent three-dimensional heat dissipation technology
- Designed to last at least 50,000 hours
- Thermal Dissipation & housing with integration, standardization and modular design
- IP65 modules: high waterproof level, easy for installation and replacement
- Light efficiency higher than 100lm/W



Flood Light



	FLL-1M-XXX	FLL-2M-XXX	FLL-3M-XXX	FLL-4M-XXX
Length:	7.6in/193mm	13.98in/355mm	20.35in/517mm	26.73in/679mm
Width:	14.02in/356mm	14.02in/356mm	14.02in/356mm	14.02in/356mm
Height:	5.59in/142mm	5.59in/142mm	5.59in/142mm	5.59in/142mm
Carton size:	240*410*170mm	400*410*170 mm	560*410*170mm	720*410*170mm
Q'ty/ctn	1 pc	1 pc	1 pc	1 pc

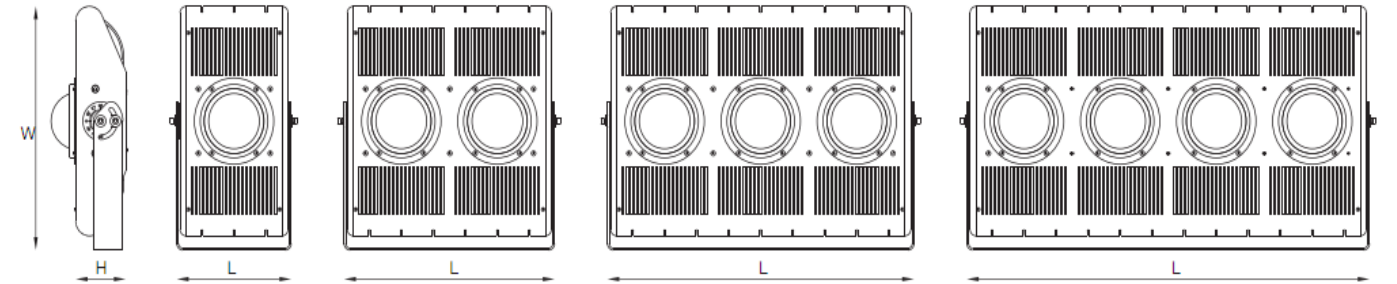

Item Code	Wattage	Color Temp	Input Voltage	Output Lumen	CRI	Dimmable
DX-FLL-1M-050	50W	3000K/4000K/5700K	100-240V/277V/480V	5000	>70	YES/NO
DX-FLL-2M-080	80W	3000K/4000K/5700K	100-240V/277V/480V	8000	>70	YES/NO
DX-FLL-2M-100	100W	3000K/4000K/5700K	100-240V/277V/480V	10000	>70	YES/NO
DX-FLL-3M-120	120W	3000K/4000K/5700K	100-240V/277V/480V	12000	>70	YES/NO
DX-FLL-3M-150	150W	3000K/4000K/5700K	100-240V/277V/480V	15000	>70	YES/NO
DX-FLL-4M-180	180W	3000K/4000K/5700K	100-240V/277V/480V	18000	>70	YES/NO
DX-FLL-4M-200	200W	3000K/4000K/5700K	100-240V/277V/480V	20000	>70	YES/NO
DX-FLL-4M-240	240W	3000K/4000K/5700K	100-240V/277V/480V	24000	>70	YES/NO

