


Features

- 85% less energy than halogen alternatives
- Smooth, clean outside housing
- Excellent color consistency and CRI
- Shatter resistant
- Easy to replace
- Fits in standard E26/E27 base socket

A19

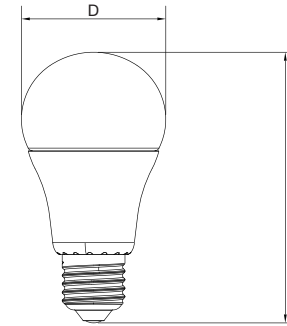


Diameter:	2.36in/60mm	Carton size:	195*176*305mm
Height:	4.33in/110mm	Q'ty/ctn:	12 pcs



Applications

- Designed to seamlessly blend into applications such as Table Lamps, Pendants, Ceiling Fans, Decorative indoor fixtures, Outdoor fixtures, etc.

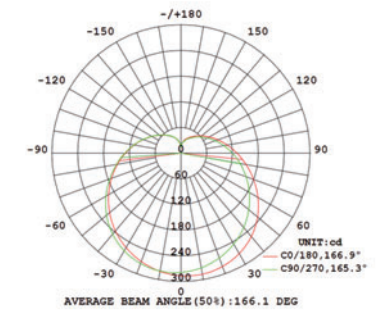

Item Code	Description	Wattage	Color Temp	Input Voltage	Output Lumen	Equiv.wattage	CRI	Beam Angle	Dimmable
DX-A19-11W-160D	LED11A19/DIM	11W	2700-6500K	120V 60Hz	1100LM	75W	80	160°	YES
DX-A19-11W-160D	LED11A19/ NON DIM	11W	2700-6500K	120V 60Hz	1100LM	75W	80	160°	NO
DX-A19-9W-160D	LED11A19/DIM	9W	2700-6500K	120V 60Hz	800LM	60W	80	160°	YES
DX-A19-9W-160D	LED11A19/ NON DIM	9W	2700-6500K	120V 60Hz	800LM	60W	80	160°	NO
DX-A19-9W-250D	LED11A19/DIM	9W	2700-6500K	120V 60Hz	800LM	60W	80	250°	YES
DX-A19-9W-250D	LED11A19/ NON DIM	9W	2700-6500K	120V 60Hz	800LM	60W	80	250°	NO
DX-A19-6W-250D	LED6A19/DIM	6W	2700-6500K	120V 60Hz	450LM	40W	80	250°	YES
DX-A19-6W-250D	LED11A19/ NON DIM	6W	2700-6500K	120V 60Hz	450LM	40W	80	250°	NO
DX-A21-1600LM-NON DIM	LED14A21/E26/865/01	14W	6500K	120V 60Hz	1600LM	100W	80	170°	NO
DX-A21-1600LM-DIM	LED14A21/E26/DIM/827/01	14W	2700K	120V 60Hz	1600LM	100W	80	170°	YES
DX-GP19-6W-160D	LED6GP19/DIM	6W	2700-6500K	120V 60Hz	450LM	75W	80	160°	YES
DX-GP19-6W-160D	LED6GP19/ NON DIM	6W	2700-6500K	120V 60Hz	450LM	75W	80	160°	NO
DX-GP19-9W-160D	LED9GP19/DIM	9W	2700-6500K	120V 60Hz	800LM	60W	80	160°	YES
DX-GP19-9W-160D	LED9GP19/ NON DIM	9W	2700-6500K	120V 60Hz	800LM	60W	80	160°	NO

