


Features

- Compatible with 5&6” standard ceiling hole
- High efficiency, Energy saving
- Excellent performance and no glare
- Slim, stylish and light weight design
- Easy to install
- Damp and Wet location

6” Downlight

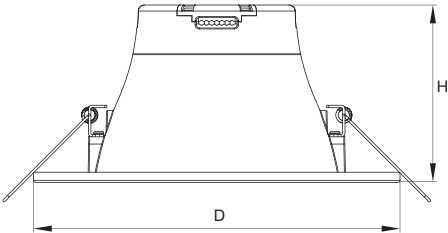

Diameter:	7.09in/180mm	Carton size:	415*360*380mm
Height:	3.39in/86mm	Q'ty/ctn:	12 pcs

Item Code	Description	Wattage	Color Temp	Input Voltage	Output Lumen	Equiv.wattage	CRI	Beam Angle	Dimmable
DX-DL6-EU-02A-13W	LED12DL6	13W	2700-6500K	230V 50Hz	1000LM	65W	80	85°	NO
DX-DL6-EU-03A-13W	LED12DL6/ANTI-GLARE	13W	2700-6500K	230V 50Hz	1000LM	65W	80	85°	NO
DX-DL6-EU-02A-13W	LED12DL6	13W	2700-3000K	230V 50Hz	850LM	60W	90	85°	NO
DX-DL6-EU-03A-13W	LED12DL6/ANTI-GLARE	13W	2700-3000K	230V 50Hz	850LM	65W	90	85°	NO

Applications

- Widely used in homes,offices,restaurants,hotels, buses,trains,warehouses,parking lots, meeting room school, library,factory, warehouse, casino,parking garage,hospital,commercial center, supermarket, shopping mall etc

