


产品特点

- 比传统卤素灯节能85%
- 平滑，整洁
- 颜色均匀，一致
- 防碎
- 易于替换
- 符合E26/E27的基座插座标准


美规 A19

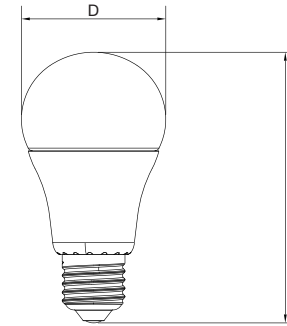

直径：	2.36in/60mm	外箱尺寸：	195*176*305mm
高度：	4.33in/110mm	装箱数量：	12 pcs

应用领域

- 完美匹配各种电器设备，比如台灯，吊灯，电风扇，室内装饰灯具，室外灯具等。

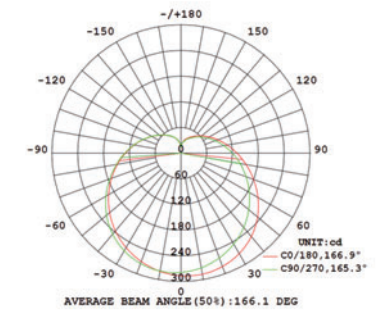

技术型号	编码	瓦数	色温	输入电压赫兹	输出流明	替代传统灯瓦数	显色指数	发光角度	是否调光
DX-A19-11W-160D	LED11A19/DIM	11W	2700-6500K	120V 60Hz	1100LM	75W	80	160°	YES
DX-A19-11W-160D	LED11A19/ NON DIM	11W	2700-6500K	120V 60Hz	1100LM	75W	80	160°	NO
DX-A19-9W-160D	LED11A19/DIM	9W	2700-6500K	120V 60Hz	800LM	60W	80	160°	YES
DX-A19-9W-160D	LED11A19/ NON DIM	9W	2700-6500K	120V 60Hz	800LM	60W	80	160°	NO
DX-A19-9W-250D	LED11A19/DIM	9W	2700-6500K	120V 60Hz	800LM	60W	80	250°	YES
DX-A19-9W-250D	LED11A19/ NON DIM	9W	2700-6500K	120V 60Hz	800LM	60W	80	250°	NO
DX-A19-6W-250D	LED6A19/DIM	6W	2700-6500K	120V 60Hz	450LM	40W	80	250°	YES
DX-A19-6W-250D	LED11A19/ NON DIM	6W	2700-6500K	120V 60Hz	450LM	40W	80	250°	NO
DX-A21-1600LM-NON DIM	LED14A21/E26/865/01	14W	6500K	120V 60Hz	1600LM	100W	80	170°	NO
DX-A21-1600LM-DIM	LED14A21/E26/DIM/827/01	14W	2700K	120V 60Hz	1600LM	100W	80	170°	YES
DX-GP19-6W-160D	LED6GP19/DIM	6W	2700-6500K	120V 60Hz	450LM	75W	80	160°	YES
DX-GP19-6W-160D	LED6GP19/ NON DIM	6W	2700-6500K	120V 60Hz	450LM	75W	80	160°	NO
DX-GP19-9W-160D	LED9GP19/DIM	9W	2700-6500K	120V 60Hz	800LM	60W	80	160°	YES
DX-GP19-9W-160D	LED9GP19/ NON DIM	9W	2700-6500K	120V 60Hz	800LM	60W	80	160°	NO

