


产品特点


- 基于专利的立体散热技术
- 至少持续50000小时的照明
- 散热&壳体一体化、标准化、模块化设计
- IP65模块：高度防水，易于安装和替换
- 整灯光效大于100lm/W
- 低眩光设计，失能眩光评价T1<10，不适眩光评价G>5



路灯

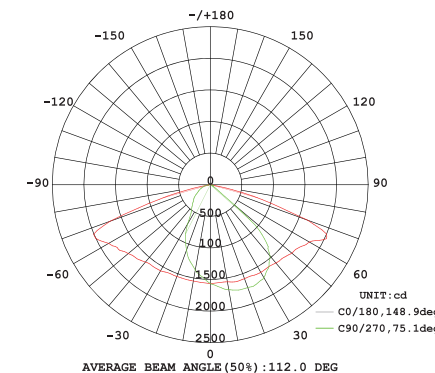

	STL-1M-XXX	STL-2M-XXX	STL-3M-XXX	STL-4M-XXX
长：	16.26in/413mm	25.64in/575mm	29.02in/737mm	35.39in/899mm
宽：	14.02in/356mm	14.02in/356mm	14.02in/356mm	14.02in/356mm
高：	3.33in/84.5mm	3.33in/84.5mm	3.33in/84.5mm	3.33in/84.5mm
外箱尺寸：	470*410*170mm	630*410*170mm	790*410*170mm	950*410*170mm
装箱数量：	1 pc	1 pc	1 pc	1 pc

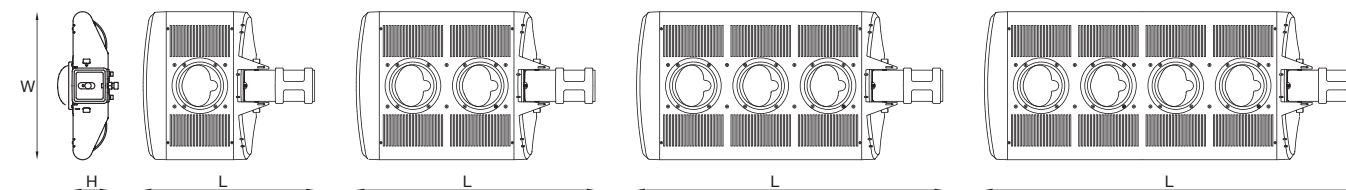

技术型号	瓦数	色温	输入电压赫兹	输出流明	显色指数	是否调光
DX-STL-1M-050	50W	3000K/4000K/5700K	100-240V/277V/480V	5000	>70	YES/NO
DX-STL-2M-080	80W	3000K/4000K/5700K	100-240V/277V/480V	8000	>70	YES/NO
DX-STL-2M-100	100W	3000K/4000K/5700K	100-240V/277V/480V	10000	>70	YES/NO
DX-STL-3M-120	120W	3000K/4000K/5700K	100-240V/277V/480V	12000	>70	YES/NO
DX-STL-3M-150	150W	3000K/4000K/5700K	100-240V/277V/480V	15000	>70	YES/NO
DX-STL-4M-180	180W	3000K/4000K/5700K	100-240V/277V/480V	18000	>70	YES/NO
DX-STL-4M-200	200W	3000K/4000K/5700K	100-240V/277V/480V	20000	>70	YES/NO
DX-STL-4M-240	240W	3000K/4000K/5700K	100-240V/277V/480V	24000	>70	YES/NO

